




Hydrophobic Acrylic Foldable
Intraocular lens
Glistening Free IOL



Hydrophobic Acrylic Foldable
Intraocular lens **Yellow**
Glistening Free IOL

Model	HFS 6125SQ	HFS 6125SQY	HFS 6130SQ	HFS 6130SQY
Overall Diameter (mm)	12.50	12.50	13.00	13.00

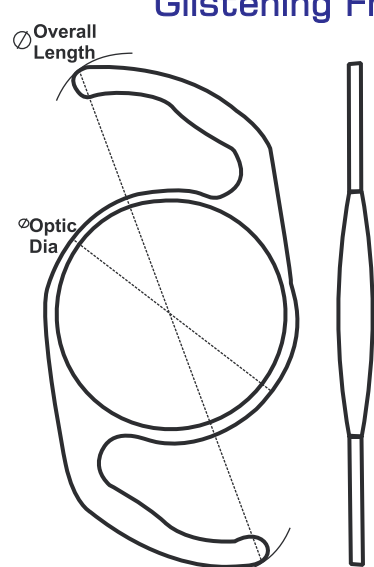Optic	6.00 mm			Specification: Glistening Free IOL 
Optic Design	Aberration Neutral, Negative Aspheric Biconvex			
Haptic Design	Step Vaulted ``C``Design, 0 Angulation			
PCO Protection	360° Perfect Square edge around the optic edge			
Delivery system	Preloaded / Non preloaded			
Power Range	-10.00 D to +40.0 D (increments 0.50 D)			
Material	Hydrophobic, Refractive index : 1.4933+0.002			
A.Constant		Ultrasound	Optical Biometry	
	SRK/T	118.4	118.7	
	SRK/II	118.6	118.9	



Scan to view
loading procedure


OPTIMA JET **Preloaded Injector System** is specially designed for smoother and safer delivery of Hydrophobic IOL

OPTIMA JET **Non-Preloaded Injector System** is smoother and safer delivery of Hydrophobic IOL

OPTIMA JET injector system deliver the IOL from **1.80 mm to 2.60 mm Incision** with various cartridges

Click-lock mechanism thereby securing the lens in the exact position for a perfect lens delivery into the eye

Lens insertion is gentle and without the lens wedging or twisting ensure a controlled release, and consequently a precise positioning in the eye

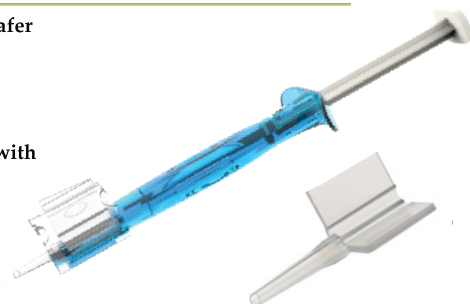

Standard Aspheric optics vision performance under low light



Aberration neutral **Optima VUE** Hydrophobic aspheric Foldable excellent visual performance under low light